



New Trace Gas Analysis Platform

Strong performance with hassle-free results in the lab or in the field.

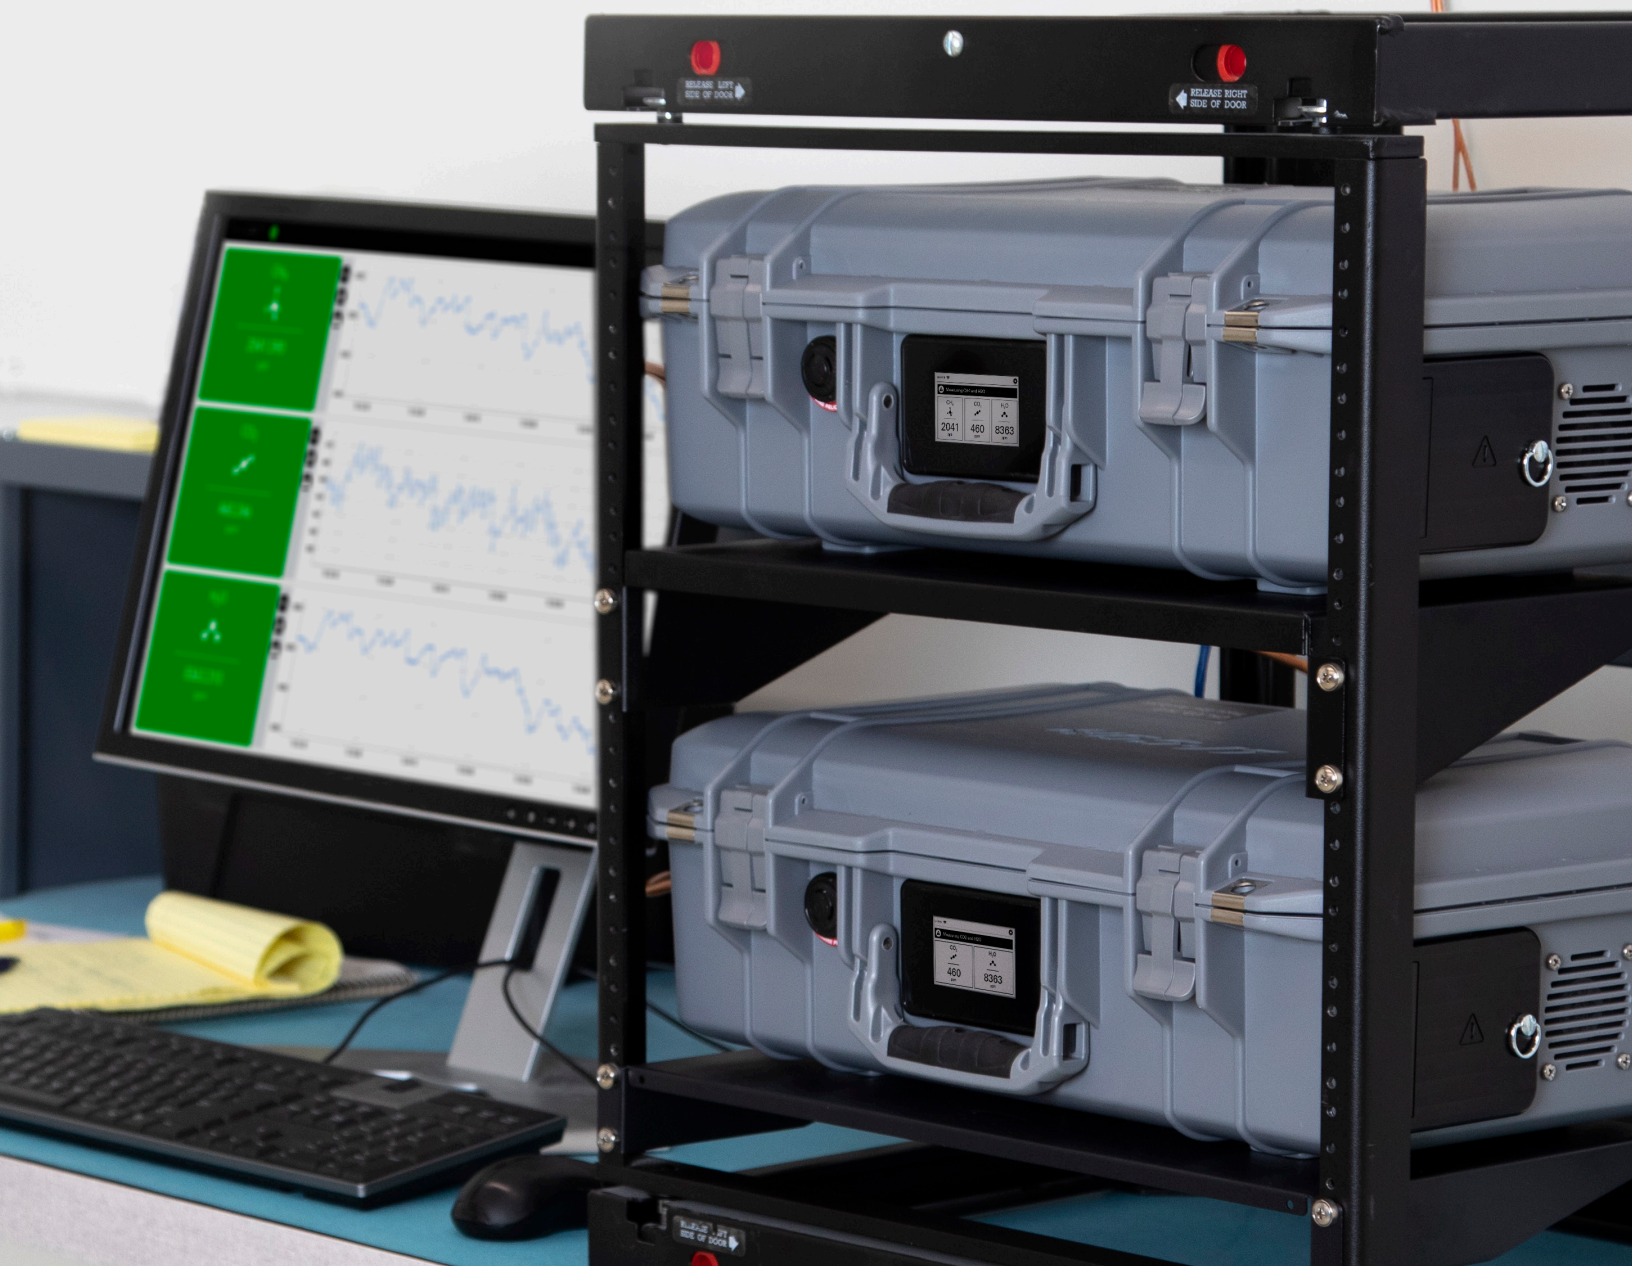

Choose Your Application, Without Limits

Get high stability and precision for
long-term monitoring and soil gas
flux applications

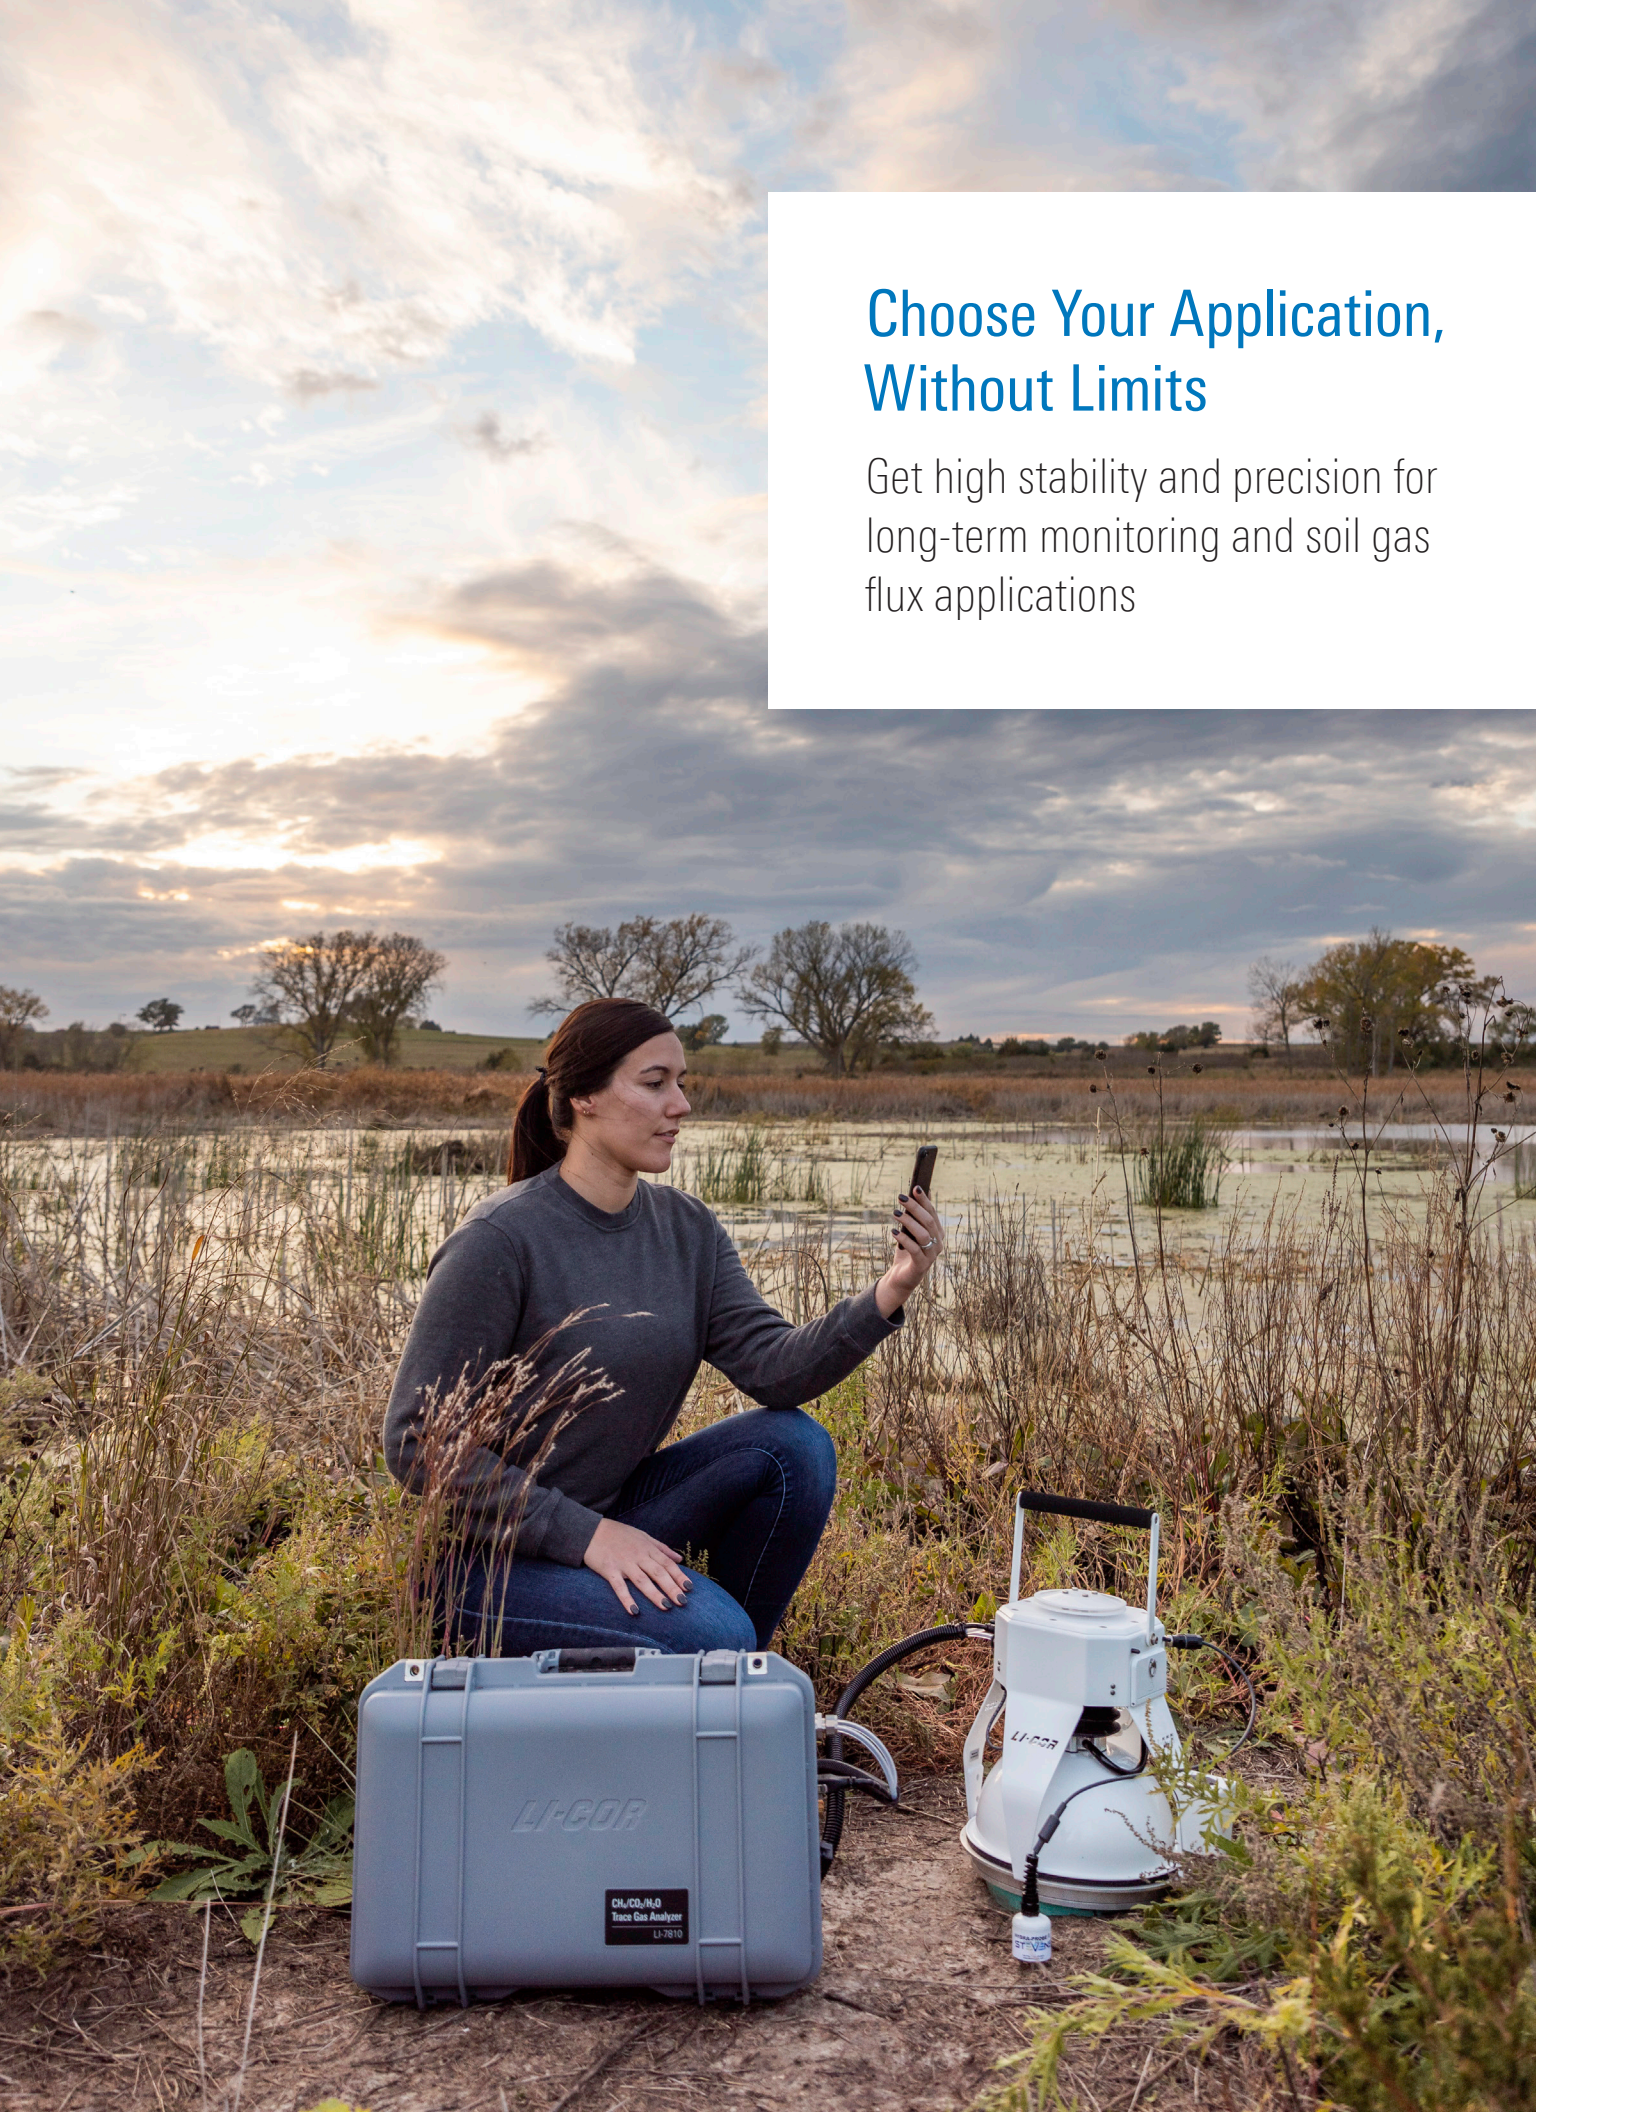



Get simple, hassle-free results in the lab or in the field with new PreciseTech™ Design, integrating multiple patented technologies that provide exceptional performance in a new lightweight, affordable mobile platform. Whether deployed long-term at a station or used for field measurements, gain the flexibility required for your research with battery or AC-power options and built-in Wi-Fi-enabled web server for convenient data viewing and communication.



Highly-Stable CH₄ Performance with the LI-7810 CH₄/CO₂/H₂O Analyzer

Capture methane measurements with 0.25 ppb precision (1 σ , with 5-second averaging) at 2000 ppb CH₄ in dry air at STP with less than 1 ppb standard drift per 24-hour period.

High-Precision CO₂ Measurements with the LI-7815 CO₂/H₂O Analyzer

Across applications, take CO₂ measurements with 0.04 ppm precision (1 σ , with 5-second averaging) at 400 ppm CO₂ in dry air at STP.

*Not available in all countries

Specifications

Measurement Technique: OF-CEAS (Optical Feedback-Cavity Enhanced Absorption Spectroscopy)

Measurement Rate: 1 sample per second (1 Hz)

Optical Cavity Volume: 6.41 cm³

Flow Rate: 250 sccm nominally

Total Weight: 11.4 kg (incl. batteries)

Case Dimensions: 51 cm L x 33 cm W x 18 cm H

Operating Temperature Range: -25 °C to 45 °C
(without solar load, under normal operating conditions)

Operating Humidity Range: 0 to 85% RH (non-condensing,
without solar load, under normal operating conditions)

Operating Pressure Range: 70 to 110 kPa

Connectivity: Ethernet, Wi-Fi (not available in some countries)

Wi-Fi Compatibility: 2.4 GHz, 802.11g

Power Consumption: 22 W (at steady-state),
up to 60 W (during warmup; up to 80 W during warmup,
depending on temperature)

Power Supply: Universal Power Adapter
(100 to 240 VAC input, 50-60 Hz; 24 VDC output)

Battery Life: 8 hours typical with 2 batteries

LI-7815 CO₂/H₂O Specifications

Response Time (T₁₀-T₉₀): CO₂ ≤ 2 seconds, 0 to 400 ppm

CO₂ Measurements

Range: 1 to 10,000 ppm

Precision (1σ):

0.10 ppm at 400 ppm with 1 second averaging

0.04 ppm at 400 ppm with 5 second averaging

H₂O Measurements

Range: 100 to 60,000 ppm

Precision (1σ):

45 ppm at 10,000 ppm with 1 second averaging

20 ppm at 10,000 ppm with 5 second averaging

Specifications subject to change without notice

LI-7810 CH₄/CO₂/H₂O Specifications

Response Time (T₁₀-T₉₀): CH₄ ≤ 2 seconds, 0 to 2 ppm

CH₄ Measurements

Range: 0.1 to 50 ppm

Precision (1σ):

0.60 ppb at 2 ppm with 1 second averaging

0.25 ppb at 2 ppm with 5 second averaging

Max Drift: < 1 ppb per 24-hour period

CO₂ Measurements

Range: 1 to 10,000 ppm

Precision (1σ):

3.5 ppm at 400 ppm with 1 second averaging

1.5 ppm at 400 ppm with 5 second averaging

H₂O Measurements

Range: 100 to 60,000 ppm

Precision (1σ):

45 ppm at 10,000 ppm with 1 second averaging

20 ppm at 10,000 ppm with 5 second averaging

Výhradní zastoupení v ČR a SR

Ekotechnika s.r.o.
K Třešňovce 700,
252 29 Karlík
Česká republika
www.ekotechnika.cz

