


2006G2




PRESSURE VACUUM HAND PUMP

The Pressure-Vacuum Pump (Model No. 2006G2) is a simple, versatile supply source of pressure or vacuum for rugged field or laboratory use. Whether you are extracting solution samples for analysis or pressurizing extractors in the field, the Pressure-Vacuum Hand Pump will move 1/2 liter of air with each pump stroke.

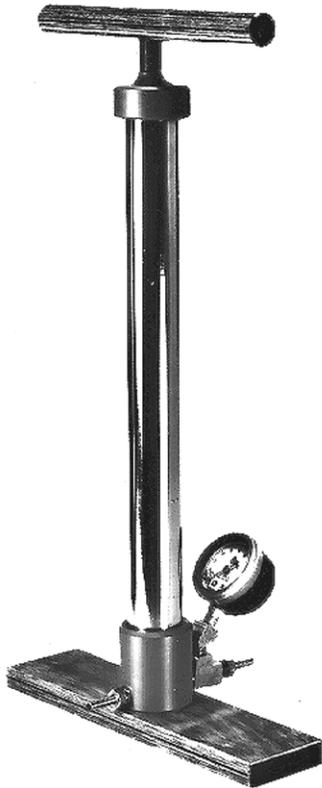

***Pressure-Vacuum Hand Pump
Model# 2006G2***

The Pressure Vacuum-Hand Pump comes complete with a 2-inch vacuum gauge to monitor the negative pressure of suction created at the vacuum port. The Pressure-Vacuum Hand Pump has fittings to connect standard 1/4-inch I.D. flexible tubing of your choice. So, if you need a reliable, lightweight hand pump for servicing tensiometers, soil water samplers, or extractors, consider the 2006G2 Pressure-Vacuum Hand Pump as your best buy.

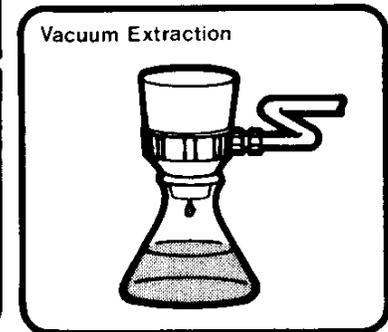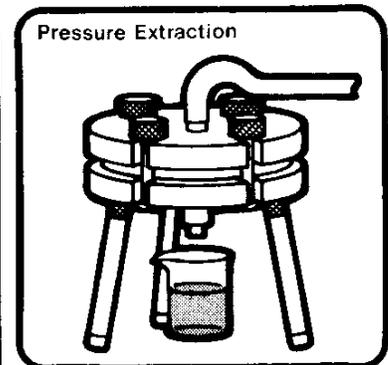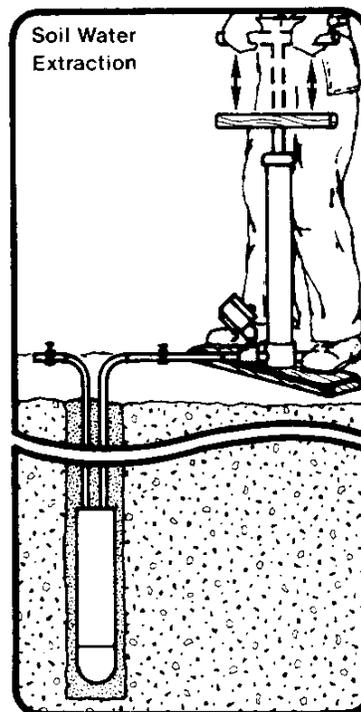

SOILMOISTURE EQUIPMENT CORP.

P.O. Box 30025 Santa Barbara, CA 93105

Phone: (805) 964-3525 Fax (805) 683-2189

E-mail: sales@soilmoisture.com WEB: <http://www.soilmoisture.com>



Features:

- Each unit is pretested to achieve vacuum levels in excess of 27 inches of mercury (90cb) and pressures in excess of 75 psi.

- The strong, lightweight laminated hardwood used in the handle and baseboard is impregnated with a high-density plastic to provide tough waterproof parts that denote the beauty of wood but will take the abuse of water and chemicals.


- Constructed with weather and corrosion resistant PVC for the top cap and valve body together with heavy wall chrome-plated brass tubing for years of rugged outdoor service.

- 1/4 inch NPT chrome fittings at the vacuum and pressure ports are barbed for 1/4 inch ID flexible tubing of your choice.

- The 2 inch vacuum gauge supplied with the Pressure-Vacuum Hand Pump is a hermetically sealed Bourdon recalibrator-type gauge, reading 0-100 centibars (kPa) of suction.

- Primarily designed for movement of air, the Hand Pump will move liquids just as easily.

- All parts, including the valves, are completely serviceable in the field for easy cleaning or repair.

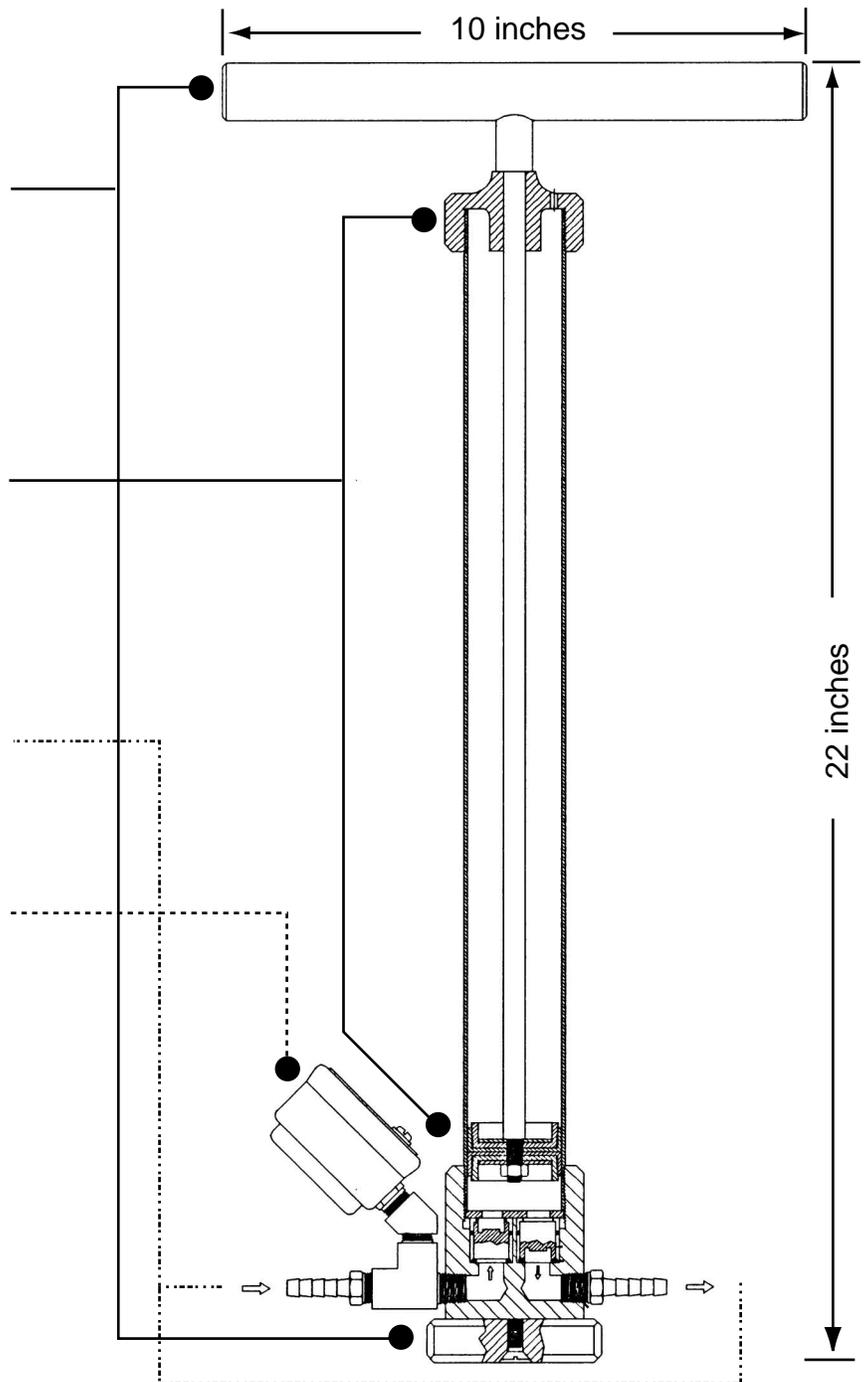

Instrument Weights

Pressure-Vacuum Hand Pump (Model 2006G2): 5 lbs, 6.4 oz. or 2.4 kilograms.

Custom orders available upon request.

0899-2006g2.pm6 (6/97)

SOILMOISTURE EQUIPMENT CORP.

P.O. Box 30025 Santa Barbara, CA 93105

Phone: (805) 964-3525 Fax (805) 683-2189

E-mail: sales@soilmoisture.com WEB: <http://www.soilmoisture.com>

